


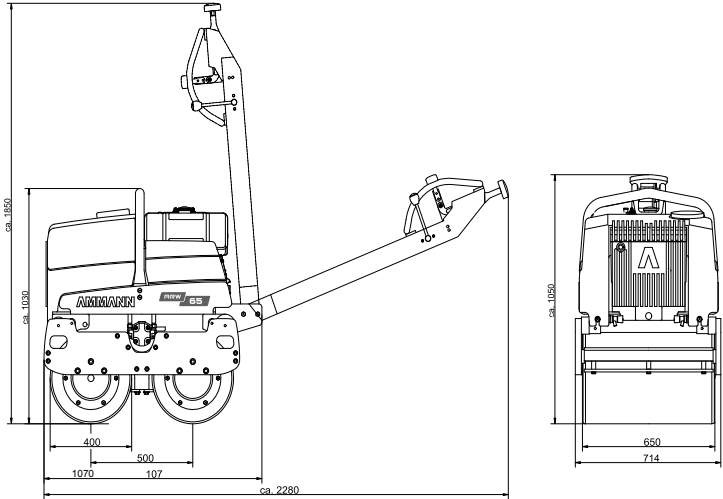

		ARW 65	ARW 65
		Hatz 1D42 S	Yanmar L100
Weight/Measurements			
operating weight CECE	kg (lb)	720 (1584)	700 (1543)
net weight, standard version	kg (lb)	695 (1532)	690 (1521)
net weight, electric starter	kg (lb)	738 (1623)	690 (1521)
working width	mm (in)	650 (26)	650 (26)
linear pressure	kg/cm (lb/in)	5 (28)	5 (28)
Drive		hydrostatic	hydrostatic
diesel engine		Hatz 1D42 S	Yanmar L100
performance	HP (kW)	8,3 (6,1)	8,3 (6,1)
travel speed, infinitely forward	km/h (mph)	4 (2,5)	4 (2,5)
travel speed, infinitely reverse	km/h (mph)	2,5 (1,6)	2,5 (1,6)
Vibration		hydrostatic	hydrostatic
centrifugal force	kN (lbf)	13/18 (2,9/4)	13/18 (2,9/4)
centrifugal force per cm drum width	N/cm (lb/in)	100/138 (57/79)	100/138 (57/79)
frequency	Hz (vpm)	55 (3300)	55 (3300)
max. gradeability with/without vibration	%	25/45	25/45
Capacities			
water	l (gal)	60 (13)	60 (13)
hydraulic oil	l (gal)	20 (4,4)	20 (4,4)
fuel	l (gal)	5 (1,1)	5 (1,1)
fuel consumption	l/h (gal/hr)	1,7 (0,4)	1,2 (0,3)
electric starter		Option	standard
Optional equipment			
operating hour meter		x	x
front protection frame		x	x
Compaction performance* large/small amplitude			
sand/gravel	cm (in)	30/25 (11,8/9,8)	30/25 (11,8/9,8)
cohesive soil	cm (in)	20/15 (7,9/5,9)	20/15 (7,9/5,9)

*depending on ground condit